


R22 PRO

MINI EXCAVATOR



HIGHLIGHTING ADVANTAGES

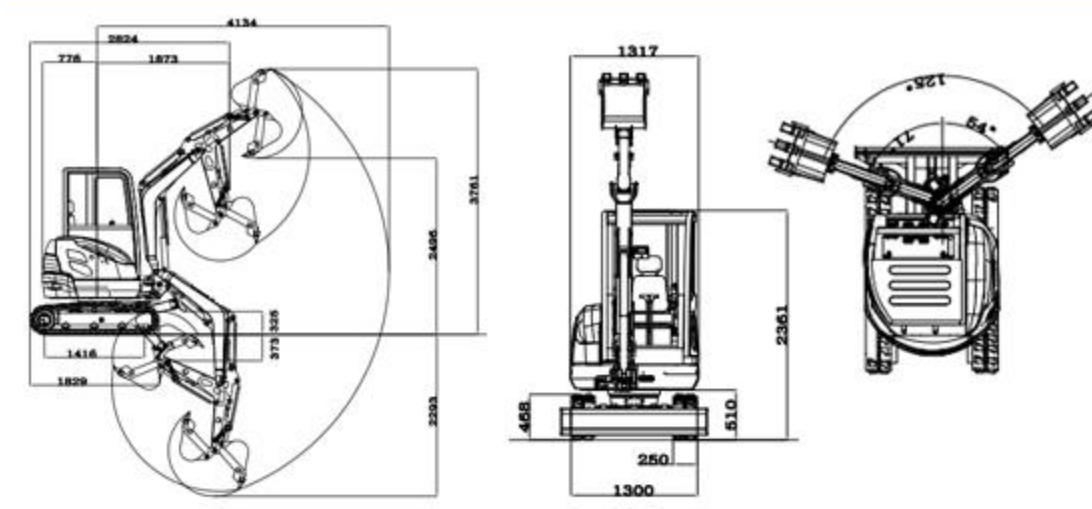

- The explosion-proof valve prevents the sudden lowering of the arm and improves safety in case of oil supply line rupture.
- Operator station equipped with fresh air system, windshield washer fluid, and shock absorbers on all four corners.
- Two-button control lever for deflection, four-way high-pressure hydraulic circuit for auxiliary equipment.
- Multifunctional cabin with thermal insulation for optimal operator comfort.
- The standard configuration includes a left/right switching valve for easy reversal of the joystick and arm.

DETAIL DISPLAY



STRUCTURAL PARAMETERS

Operating weight	2439kg	5366lb
Bucket capacity	0.054m³	1.9ft³
Maximum digging radius	4255mm	167.5in
Maximum digging depth	2293mm	90.3in
Maximum digging height	3761mm	148.1in
Maximum dumping height	2496mm	98.3in
Maximum steering angle	125°	125°
Track gauge	1300-1500mm	51.2-59.1in
Engine brand	Kubota	Kubota
Engine model	D1105	D1105
Maximum power	18.2Kw	24hp
Number of cylinders	3	3
Transport length	2824mm	111.2in
Transport width	1300mm	51.2in
Transport height	2361mm	93in