




R32 PRO

MINI EXCAVATOR

HIGHLIGHTING ADVANTAGES

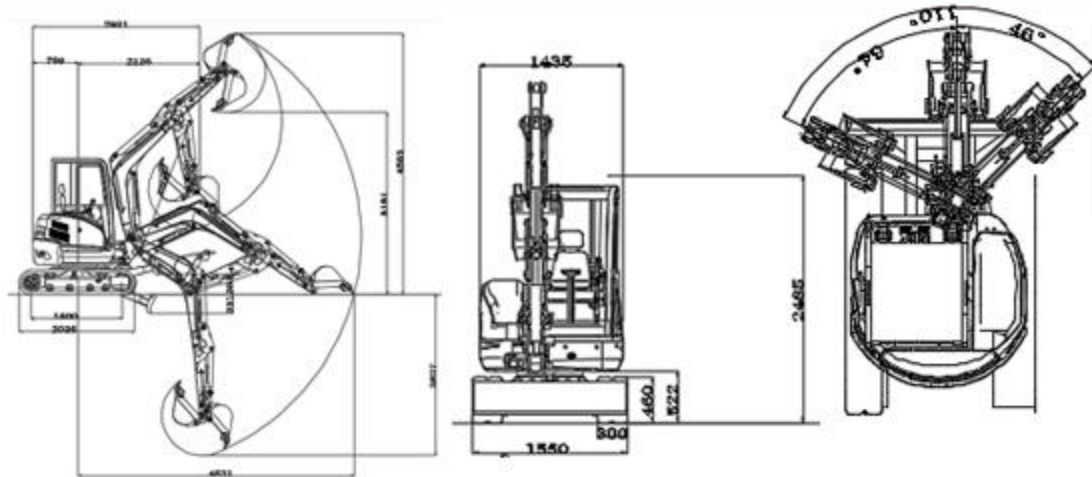

- Climate-controlled seat: the operator can adjust the seat to the optimal air pressure according to their needs.
- Anti-explosion valve: in case of an oil supply line rupture, it prevents the sudden lowering of the arm, thus improving safety.
- Standard reversible manual control valve: allows operation on both the left and right sides of the joystick and arm.
- Operator's station: equipped with a ventilation system, which improves air quality and comfort in the cab.
- Adjustable left armrest height and position: easier access.

DETAIL DISPLAY



Opening windscreen



Air conditioner



Forward/reverse
switching valve



Explosion-proof valve



Shock-absorbing seats



Smart screen

STRUCTURAL PARAMETERS

Operating weight	3219kg	7082lb
Bucket capacity	0.08m³	2.83ft³
Maximum digging radius	4831mm	190.2in
Maximum digging depth	2827mm	111.3in
Maximum digging height	4563mm	179.6in
Maximum dumping height	3181mm	125.2in
Maximum steering angle	110°	110°
Track gauge	-	-
Engine brand	Kubota	Kubota
Engine model	V1505	V1505
Maximum power	18.2kw	24.4hp
Number of cylinders	4	4
Transport length	2921mm	115in
Transport width	1550mm	61in
Transport height	2369mm	93.3in